



## Precast support without offset

Contact person and telephone number for queries: \*

Fields marked with an asterisk "\*" must be filled in.

Please fill in missing information.

Anchoring to exposed concrete:


- Ceiling
- Beams
- Wall
- Suspender beam or joist

Combination of:  
(e.g. Ceiling + Suspender beam)

Concrete grade:

(≥ C20/25)

e.g. sun protection available

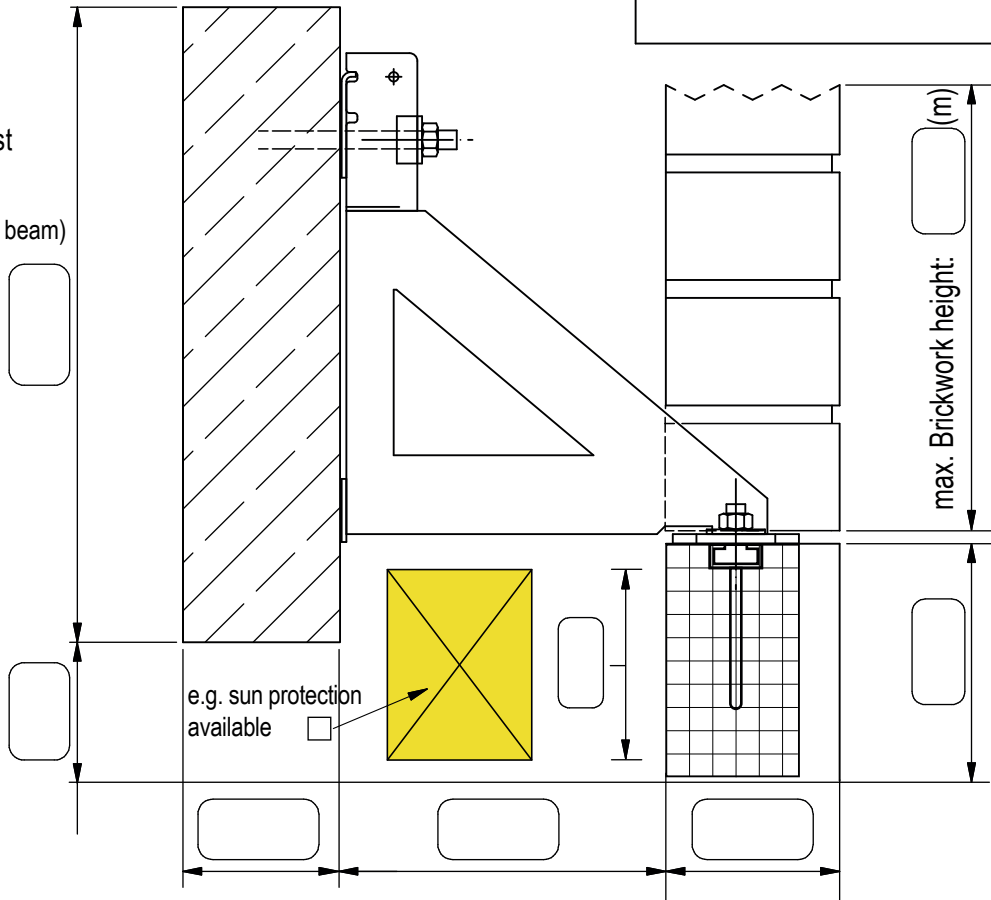


max. Brickwork height:  (m)


Clinker raw density:  kN/m<sup>3</sup>

Solid bricks:  Perforated bricks:

Length of the opening / lintel  
(Indication in m)





Length of the corner joints  
(Indication in m)



Further positions:

- 2. position:
- 3. position:
- 4. position:
- 5. position:

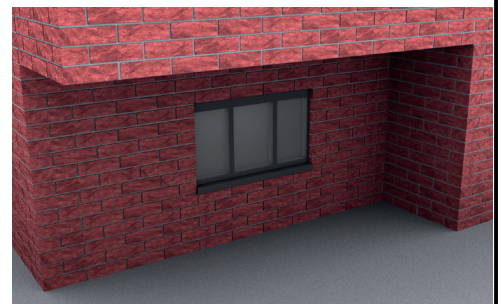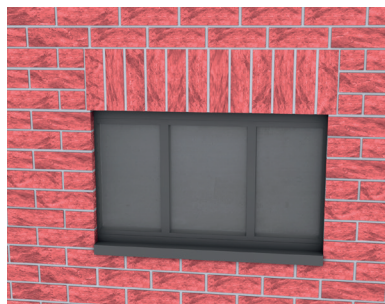

Editor:

Date:

Wilhelm Modersohn GmbH & Co.KG  
Industriestraße 23, 32139 Spenge

Tel.: +49 5225 8799-0

Fax: +49 5225 6710

E-Mail: info@modersohn.de